



NOBLES[®]
ENGINEERED BY TENNANT COMPANY

STRIVE[®] RIDER

Dual-technology carpet cleaner



ReadySpace® plus deep extraction: Unbeatable dual-technology carpet cleaning.

The Strive® Rider

It's fast.

With ReadySpace technology on your Strive Rider, large carpeted areas are clean, dry, and ready for use in less than 30 minutes.

It's powerful.

Use the Strive Rider's deep extraction technology for maximum dirt removal. Heavy-duty brushes and powerful vacuum lift will give you unmatched cleaning results.

It delivers.

Whether it's thorough, frequent cleaning or deep, occasional cleaning - this versatile machine does the job.



Five no-nonsense features

1. ReadySpace or deep extraction

Quickly, easily change from deep extraction technology for restorative cleaning, to ReadySpace technology for clean, dry carpets in less than 30 minutes!



2. Big solution/recovery tanks

Clean longer without having to empty and refill the 32 gal / 121 L solution and 28 gal / 106 L recovery tanks.



3. Comfortable and simple


Sit comfortably in the ergonomically designed compartment, and let the Quick-Train™ controls simplify your cleaning.

Built to be **tough**. Made to be **easy**.



Patented ReadySpace® Technology Clean, dry carpets in less than 30 minutes.

ReadySpace technology removes the soil before it becomes deeply embedded:

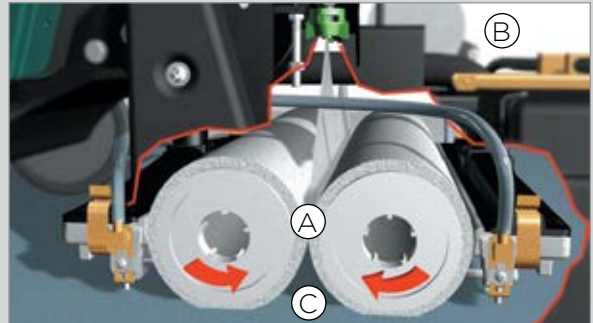

- A)** Damp soil-transfer rollers grab dirt from carpet fibers and lift it into the machine.
- B)** Inside, sprayers rinse the rollers, not the carpet.
- C)** Two powerful vacuum shoes suck the dirty water into the recovery tank.

Because the carpet itself is never saturated, dry time is significantly reduced.

With ReadySpace technology, you will...

Turn your just-cleaned carpeted spaces around quicker, keep rooms open for traffic longer, and clean high traffic areas more often.

4. Easy to fill

Easy-to-access front and rear fill ports mean there aren't any messy solutions or spilled water to clean up.



5. Iron-clad warranty

3 years, 1500 hours on parts and labor (excluding batteries).
10 years on tanks.





Engineered by Tennant Company, the Strive® Rider is the smart, reliable choice for your no-nonsense cleaning needs.

Optional Equipment

Flashing lights, storage basket, recovery and solution hoses, hand tool, vacuum drag wand

Warranty

3 years/1500 hours on parts and labor (excluding batteries). 10 years on rotationally-molded polyethylene tanks.



Certified Bronze by the Carpet and Rug Institute's (CRI) Seal of Approval program

Nobles

701 North Lilac Drive
Minneapolis, MN 55422
USA/Canada: +1.800.553.8033
Quebec: +1.800.361.9050
www.nobles.com
nobles@tennantco.com

Specifications		
Cleaning path	28 in	710 mm
Productivity (per hour)		
Theoretical max - ReadySpace®	13,000 ft ²	1,210 m ²
Estimated coverage - ReadySpace	10,000 ft ²	930 m ²
Theoretical max - extraction	7,500 ft ²	700 m ²
Estimated coverage - extraction	5,000 ft ²	470 m ²
Down pressure		
ReadySpace	104 lb standard, 152 lb heavy	47 kg standard, 69 kg heavy
Extraction	32 lb standard, 84 lb heavy	15 kg standard, 38 kg heavy
Solution tank - cleanable	32 gal	121 L
Recovery tank - cleanable	28 gal	106 L
Roller/brush size (dual cylindrical)	27.5 in	700 mm
Roller/brush speed	270 rpm	270 rpm
Brush motor (2)	0.54 hp	0.40 kW
Vacuum shoe (2)	16.5 in (removable without tools)	420 mm (removable without tools)
Vacuum fan (2)	3-stage, 0.6 hp	3-stage, 0.45 kW
Vacuum Motor Airflow (max)	66.5 CFM	1.88 m ³ /min
Vacuum system airflow (actual)		
ReadySpace	48 cfm	1.36 m ³ /min
Extraction	32 cfm	0.91 m ³ /min
Vacuum Motor Sealed Water Lift	70.5 in	1,790 mm
Vacuum system sealed waterlift	56 in	1,420 mm
Solution pump rated pressure (max)	250 psi	17.2 bar
Solution working pressure - ReadySpace	30 psi at spray tips	2.07 bar at spray tips
Solution working pressure - Extraction	52 psi at spray tips	3.59 bar at spray tips
Solution spray rate - ReadySpace	0.33 gpm	1.25 lpm
Solution spray rate - Extraction	1.24 gpm	4.7 lpm
Cleaning speed - ReadySpace		
Standard	100 fpm	30 mpm
Maximum	150 fpm	46 mpm
Cleaning speed - extraction		
Standard	50 fpm	15 mpm
Maximum	75 fpm	23 mpm
Transport speed forward	290 fpm	88 mpm
Transport speed reverse	175 fpm	53 mpm
Gradeability		
Transport at gross weight	6° / 10.5%	6° / 10.5%
Transport (empty for trailering)	11° / 19.25%	11° / 19.25%
Working	3° / 5%	3° / 5%
Standard capacity batteries (24 V)	335 AH	335 AH
Battery run time (max)	3.0 hr	3.0 hr
Sound level (operator's ear)	73 dBA	73 dBA
Minimum aisle turn	64 in	1,630 mm
Product length	61.5 in	1,560 mm
Product width	31.5 in	800 mm
Product height	52 in	1,320 mm
Product weight	835 lb	379 kg
Product weight - with batteries	1,225 lb	556 kg

Specifications subject to change without notice.