



SPEED SCRUB® 350

Stand-On Floor Scrubber



Confidence comes from choosing equipment that helps you meet your facility goals

The Speed Scrub® 350

Cost Effective & Reliable

- Clean over 30,000 square feet per hour without sacrificing performance
- Maximize machine usage with up to 94 minutes between dumps and fill cycles and up to 4 hours of battery run time

Versatile Cleaning Performance

- Reduce the risk of slip-and-fall accidents with advanced squeegee design
- Incorporate daytime cleaning with Quiet-Mode™ that reduces machine noise levels to as low as 59.7 dBA

Easy Operation & Maintenance

- Ensure operator comfort and control with ergonomics and easy-to-use steering and controls
- Simplify training with on-board machine instructions for operators



Innovative technologies

1. Smart-Fill™ Automatic Battery Watering System

Smart-Fill™ makes battery maintenance safer by removing the task of checking, opening, and filling flooded batteries.



2. Pro-Panel® LCD touchscreen Technology

Deliver predictable cleaning results with operator ID, on-demand tutorial videos and customizable Zone Settings™ with Pro-Panel technology.




Built to be **tough**. Made to be **easy**.



SPEED SCRUB® 350 PROVIDES CATEGORY LEADING PRODUCTIVITY

Tennant practical productivity calculations

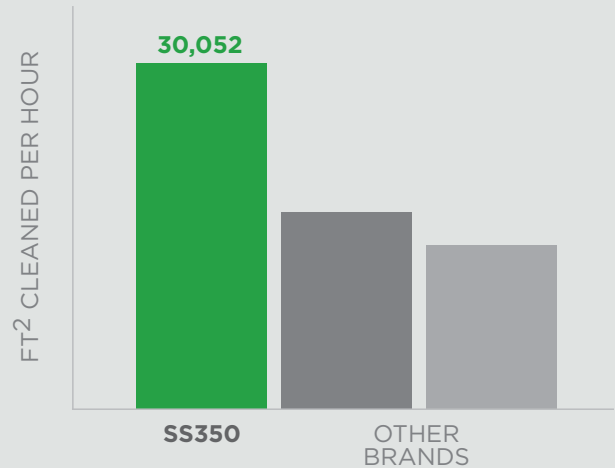

EXCLUSIVE TECHNOLOGY (optional cleaning innovation)

ec-H2O NanoClean®
technology electrically
converts water into



an innovative cleaning solution that cleans effectively, saves money, improves safety, and reduces environmental impact compared to daily cleaning floor chemicals and methods.†

†ec-H2O NanoClean® technology is not suitable for all soils, including heavy concentrations of fats and oils. Depending on the type of soil, conventional chemical cleaners may be required.

- 3. IRIS® Asset Manager**
Increase productivity, reduce cost to clean and make informed decisions with intelligent insights from IRIS® Asset Manager.



- 4. Insta-Click™**
Optional magnetic head allows pads and brushes to be ergonomically positioned and results in faster installation.



SPEED SCRUB® 350 STAND-ON FLOOR SCRUBBER



| | 20 IN / 500 MM SINGLE DISK SELF PROPEL | 24 IN / 600 MM DUAL DISK SELF PROPEL |
|--|--|--|
| Cleaning Tool Attachment | 3-Lug Standard / Insta-Click™ Optional | 3-Lug Standard / Insta-Click™ Optional |
| Machine Speed | | |
| Top Scrub and Forward Transport | 3.6 mph (5.8 km/hr) | 3.6 mph (5.8 km/hr) |
| Top Reverse Transport | 1.1 mph (1.8 km/hr) | 1.1 mph (1.8 km/hr) |
| Scrubbing Coverage Rate Per Hour | | |
| Theoretical Max | 31,680 ft ² (2,946 m ²) | 38,016 ft ² (3,535 m ²) |
| Conventional - Practical | 24,588 ft ² (2,287 m ²) | 30,052 ft ² (2,795 m ²) |
| ec-H2O NanoClean® - Practical | 25,284 ft ² (2,351 m ²) | 30,903 ft ² (2,874 m ²) |
| CONTROL PANEL | | |
| Pro-Membrane™ | Standard | Standard |
| LCD Pro-Panel™ Touch Screen | Optional | Optional |
| BRUSH/PAD DRIVE SYSTEM | | |
| Cleaning Path | 20 in / 500 mm | 24 in / 600 mm |
| Pad/Brush RPM | 215 rpm | 275 rpm |
| Pad/Brush Down Pressure | 62 & 90 lbs (28 & 41 kg) | 64 & 91 lbs (29 & 41 kg) |
| Scrub Motor | 24 VDC, 0.87 HP / 0.65 kW | 24 VDC, 0.87 HP / 0.65 kW |
| SOLUTION/RECOVERY SYSTEM | | |
| Solution Tank Capacity | 14.1 gal (53 L) | 14.1 gal (53 L) |
| Recovery Tank Capacity | 18.4 gal (70 L) | 18.4 gal (70 L) |
| Drive Motor | 24 VDC, 0.64 HP / 0.48 kW | 24 VDC, 0.64 HP / 0.48 kW |
| Vacuum Motor | 24 VDC, 0.62 hp / 0.46 kW | 24 VDC, 0.62 hp / 0.46 kW |
| Vacuum Water Lift | 42 in (1,067 mm) | 42 in (1,067 mm) |
| CLEANING TECHNOLOGY | | |
| Conventional | Standard | Standard |
| ec-H2O NanoClean® Technology | Optional | Optional |
| Conventional Water Flow | 0.15 / 0.35 / 0.50 gpm | 0.15 / 0.35 / 0.50 gpm |
| ec-H2O NanoClean® Technology | 0.57 / 1.32 / 1.89 lpm | 0.57 / 1.32 / 1.89 lpm |
| Water Flow | 0.12 / 0.25 / 0.35 gpm | 0.12 / 0.25 / 0.35 gpm |
| | 0.45 / 0.95 / 1.32 lpm | 0.45 / 0.95 / 1.32 lpm |
| BATTERY SYSTEM | | |
| System Voltage / Battery Count | 24 Volts / 4 | 24 Volts / 4 |
| Batteries | Wet 210 AH | Wet 210 AH |
| | Wet 240 AH (Provides longest run time) | Wet 240 AH (Provides longest run time) |
| | Sealed AGM 220AH | Sealed AGM 220AH |
| Battery Run Time* (Up to Hours) | 3.1 | 4.0 |
| On-Board Charger | Yes | Yes |
| Off-Board Charger | Yes | Yes |
| DECIBEL RATINGS AT OPERATOR EAR** | | |
| Standard - dBA | 63.7 | 64.5 |
| Quiet-Mode™ - dBA | 59.7 | 61.3 |
| MACHINE DIMENSIONS AND WEIGHTS | | |
| Overall Width with Squeegee | 30.1" / 765 mm | 31.2" / 793 mm |
| Length X Width X Height | 55 X 26.5 X 49 Inches | 55 X 26.5 X 49 Inches |
| | 1,397 X 673 X 1,245 mm | 1,397 X 673 X 1,245 mm |
| Weight (less batteries) | 490 lbs / 222 kg | 495 lbs / 225 kg |
| Weight (with batteries) | 725 lbs / 329 kg | 730 lbs / 331 kg |

See your local representative for warranty information



ec-H2O NanoClean™ technology is NFSI (National Floor Safety Institute) Certified



ec-H2O NanoClean technology is registered by NSF International

*Run times are based on Continuous Scrubbing Run Times.

**Sound levels per ISO 11201 as recommended by the American Association of Cleaning Equipment Manufacturers & OSHA.

Specifications subject to change without notice.

Engineered by Tennant Company, the Speed Scrub® 350 is the smart, reliable choice for your no-nonsense cleaning needs.

Nobles

701 North Lilac Drive
Minneapolis, MN 55422
USA/Canada: +1.800.553.8033
Quebec: +1.800.361.9050
www.nobles.com
nobles@tennantco.com